



Dynamic White Components

Specification Data

	Dynamic White Control	Type
Project		
Notes		




ORDER GUIDE	Protocol	Controller	Part No.	Qty
Choose matching Dynamic White protocol in luminaire	0-10V	0-10V to DALI converter module (1 per zone)	CM1-DW-01	
	nLight	Acuity nLight converter module (1 per driver)	CM1-DW-02	

0-10V CONVERTER FOR DYNAMIC WHITE


Features

- Converts analog 0-10V signal to DALI eldoLED dynamic white drivers
- Field install in 4"x4" j-box
- 1 converter per dimming zone. All drivers on DALI bus receive same command.
- Powers DALI bus for 12 drivers
- No commissioning required (pre-programmed DALI driver addressing)
- A/C on/off wall switch not required (dim level triggers off command)

Dimensions

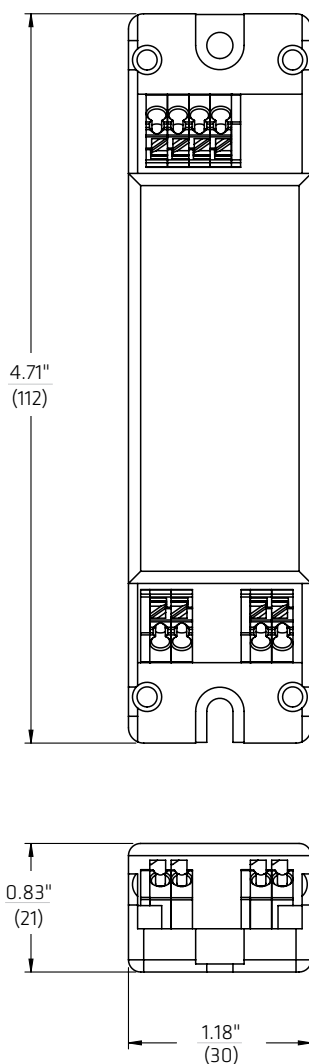


Wiring Diagram

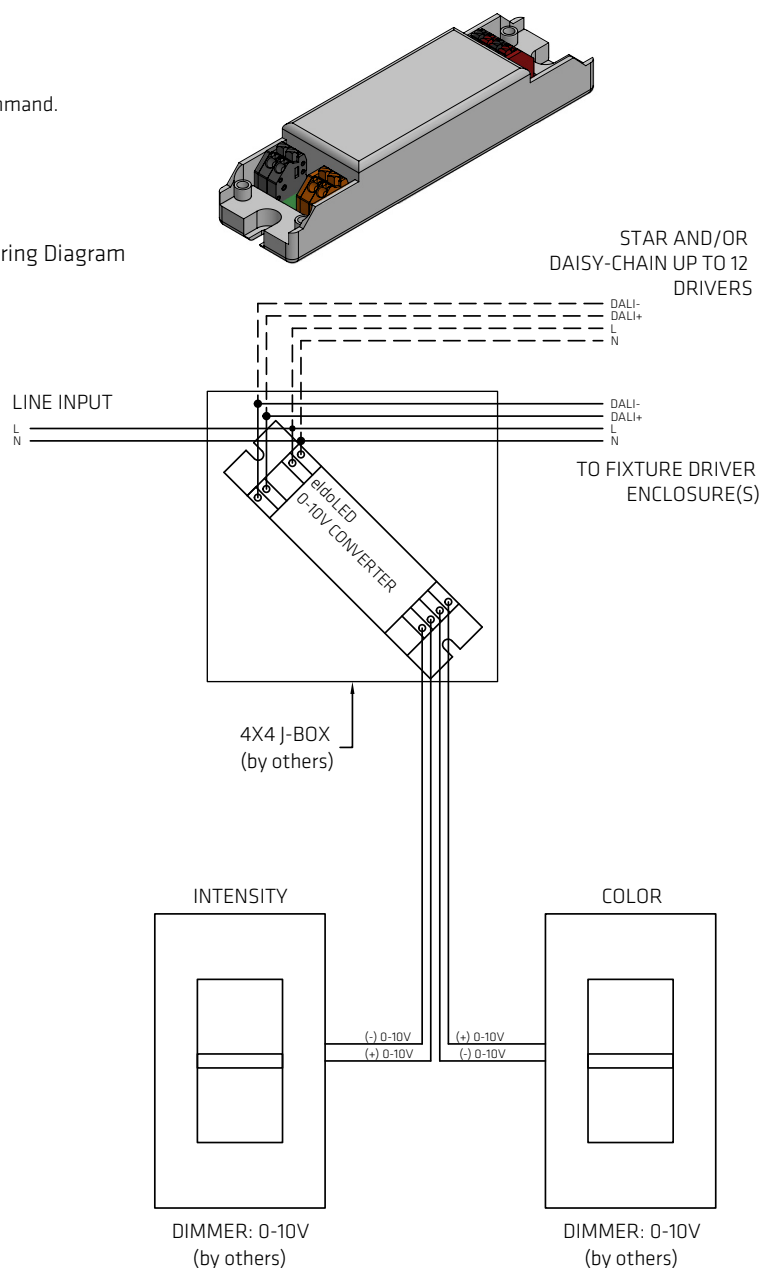



nLIGHT CONVERTER FOR DYNAMIC WHITE

Features

- Converts Acuity nLight signal to eldoLED dynamic white drivers
- 1 converter per driver, factory installed in recessed products
- For suspended luminaires, included with shipment for field installation in a 4"x4" j-box.
- No commissioning needed for single zone application with nLight wall dimmer nPODM 2P DX CCT (supplied by others)

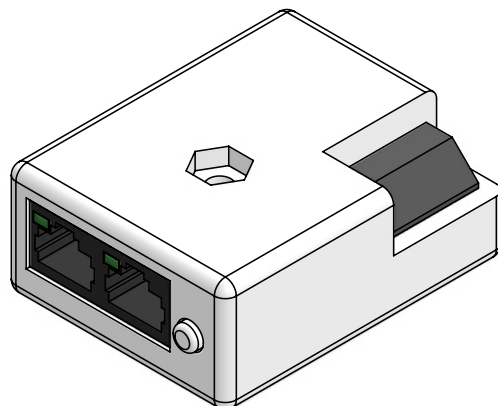

Dimensions

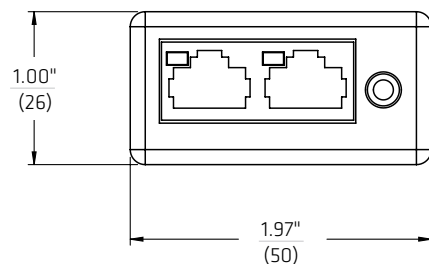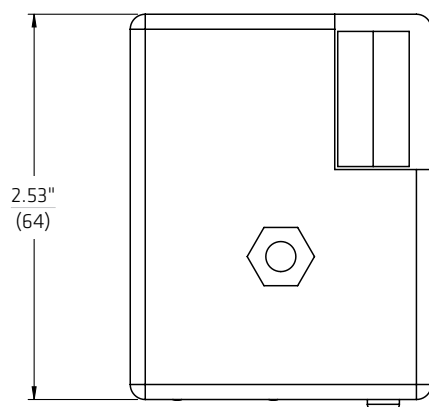

Wiring Diagram

